




# Série - TAS

## Especificações

## Especificaciones

## Features

Capacidade									
Capacidad	t	30 F1 4C	45 F1 4C	85 F1 4C	120 F1 2B	160 F1 2B 4C	200 F1 2B 4C	250 F1	
Capacity									
Curso do martelo									
Carrera del martillo	mm	32	32	38	50	50	50	30	
Stroke length									
Velocidade									
Velocidad	gpm	150 a 1000	150 a 1000	100 a 300	100 a 300	100 a 300	100 a 300	120 a 450	
Speed									
Mesa									
Mesa	mm	610x420	610x420	550x600	1400x800	1230x1000	1800x850	2100x1100	
Bolster									
Altura de trabalho									
Altura de trabajo	mm	1,1	1,5	2	2	2,0	2,5	3	
Working height									
Regulagem martelo									
Ajuste del martillo	mm	50	50	100	100	150	150	100	
Slide adjustment									
Distância máx. mesa x martelo									
Distancia max. mesa y martillo	mm	350	432	450	565	500	600	455	
Bolster to slide max. distance									
Altura ferramenta fechada									
Altura del troquel cerrado	mm	318	400	412	515	450	550	425	
Die Height (S.D.A.U.)									
Altura piso à mesa									
Altura del piso a la mesa	mm	1080	1080	850	850	1050	1050	1295	
Floor to bolster height									
Potência do motor									
Potencia del motor	cv	25	25	25	25	40	50	75	
Main motor									
Peso aproximado									
Peso aproximado	kg	5570	7000	8830	11500	26500	37500	70000	
Approximate weight									

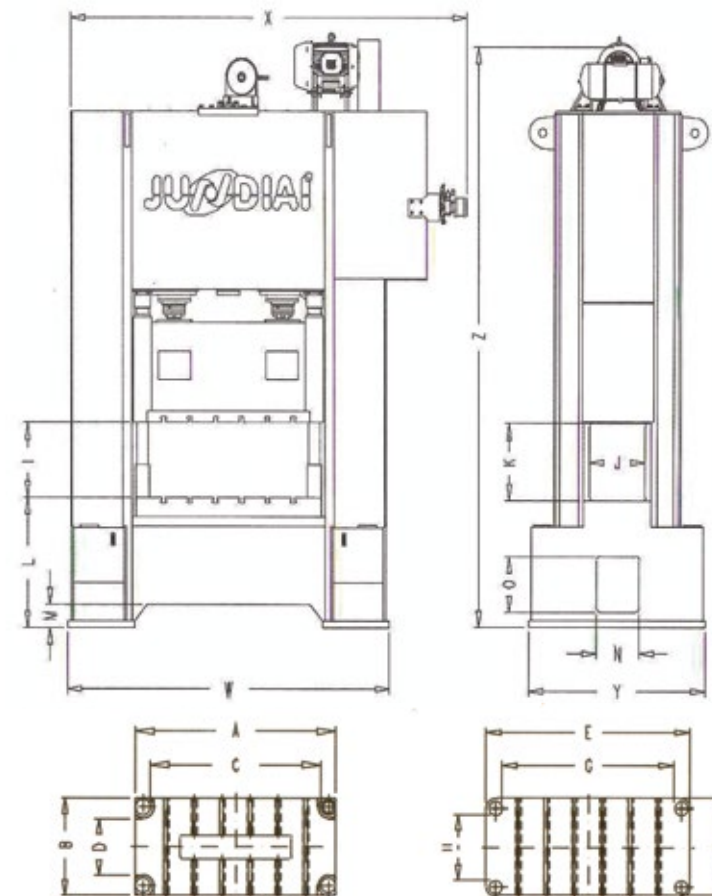

## MESA

MESA  
BOLSTER

## MARTELO

MARTILLO  
SLIDE

## CINEMÁTICA

CINEMÁTICA  
KINEMATICS

## Dimensões

## Dimensiones

## Dimensions

Modelo Model Modelo	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	W	X	Y	Z
TAS 30 F1 (mm)	830	650	620	430	740	420	620	420	350	310	250	1055	350	400	385	1580	1755	1320	3300
TAS 45 F1 (mm)	830	650	620	430	740	420	620	420	432	310	350	1055	350	400	385	1580	1955	1320	3505
TAS 85 F1 (mm)	800	650	560	390	760	600	550	380	450	330	410	850	200	500	350	1540	2040	1350	3780
TAS 120 F1 (mm)	1400	800	-	-	1400	800	1160	800	565	330	370	850	217	500	350	2360	2780	1400	3765
TAS 160 F1 (mm)	1500	1000	1230	730	1525	1000	1200	700	500	600	500	1050	150	400	450	2600	3810	1650	4520
TAS 200 F1 (mm)	1800	850	1530	580	1825	850	1500	555	600	600	600	1050	150	400	450	3090	3915	1650	4730
TAS 250 F1 (mm)	2100	1100	-	-	2840	1385	2100	1100	455	815	425	1295	322	450	600	3656	3885	2690	5400

Portugues

Español

English

F1 - Curso fixo / Volante

F1 - Carrera fija / Volante

F1 - Fixed Course / Steering wheel



www.prensajundiai.com



vendas@prensajundiai.com



55 11 4039 8200 / 4039 8235



Rod. Edgar Máximo Zamboto - Nº 5500 - Km 55 • Sítio Lagoa Branca • CEP 13231-700 • Campo Limpo Paulista • São Paulo • Brasil